

HCBS-1/8TX


HORIZONTAL CONVEYORIZED ROTARY BAND SEALING SYSTEM

- USDA approved smokeless and odorless Horizontal Conveyorized Rotary Band Sealing system with Bag Top Trimmer.
- Designed for a wide range of applications including: Medical, Food, Candy, Paper Goods, Textiles, Poultry, Bakery, Toys, Crafts, Garden, Pet Supplies, Decorative, Automotive, Mailroom, Electronics, Jewelry, Mailroom, Parts Kits and many more!
- Easy speed control adjustment with permanent magnet DC gearmotor along with full mechanical linkage allows for positive sealer to conveyor synchronization.
- Designed to seal materials: Polyethylene, Nylon, Polypropylene, Laminates, Foils, Tyvek/Polyester and Shrink Films.
- Sealing capacity allows variable speeds of up to 100 feet per minute with constant secure seals of 1/8", 1/4" or 3/8" wide with bag top trimmer. Actual sealing speed depends on structure and thickness of material being sealed.
- Products 3"-25" long, up to 3' wide and up to 6" in height. Wider conveyors for longer products.
- Conveyor belts up to 4' wide, up to 40' in length.
- Seals are achieved through the use of special heavy duty wear-resistant laminated Teflon bands.
- Digital Temperature Control with PID Autotune maintains consistent heat and assures quality hermetic seals.
- Hard Chrome plated sealing bars followed by Nickel plated cooling bars allow for maximum wear resistance.
- No compressed air required.



12" wide
8' Long
Conveyor
shown

- Unit is designed with 5" long heating zone and 5" long cooling zone for greater flexibility in product sealing of difficult materials with temperatures up to 450 degrees Fahrenheit.
- Adjustable all-welded steel or optional Stainless Steel stand for tilting the Conveyorized Sealing System assuring uniform packages.
- Adjustable bag leveling device maintains top portion of bag on level plane – assures durable flat seal.
- Optional Product Jam Sensor prevents damage to product and sealing assembly.
- Optional 3", 6", 9" or 12" wide Compression Assembly available removes excess air from bagged product.
- Optional Close Trim Pull-in feature for products requiring a tight fit is available.
- Optional Single Line Embossing Code is available on most models.
- Electrical 110 VAC 10 amps/ 60 Cycle.

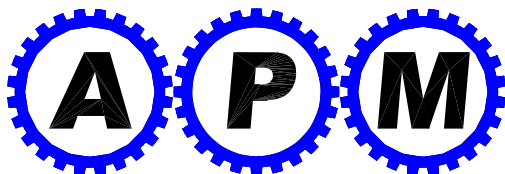

OVER 50 YEARS OF SUCCESSFUL PACKAGING EXPERIENCE

ALL PACKAGING MACHINERY, CORP.

90 13th Avenue, Ronkonkoma, NY 11779

(631) 588-7310 Fax (631) 467-4690

Call Toll Free 1-800-637-8808

www.allpackagingmachinery.com