


TBS-3/8-V VALIDATABLE MEDICAL ROTARY BAND SEALER FOR MEDICAL POUCHES



- Tabletop Model TBS-3/8-V shown with Embosser option is designed to be compact, portable, smokeless and odorless.
- Unit is designed with 5" long heating zone and 5" long cooling zone for greater flexibility in product sealing of difficult materials with temperatures up to 450 degrees Fahrenheit.
- Digital gauges with alarms allow sealing parameter validation.
- Sealing capacity allows variable speeds up to 45 feet per minute with constant secure seals of 1/4" or 3/8" wide without bag top trimmer.
- Sealing materials: Tyvek® pouches, Foil, Polyethylene, Polypropylene, Nylon and Laminates.
- Gauges are easy to read and highly visible.
- Swivel Base designed for sealing from vertical to 45-degree position.
- Quick and Easy changeover and cleaning of the Teflon bands due to an "Instant Pressure Release" on bands when placed in an open position.
- Dual Digital Temperature Controls maintain consistent heat and assures quality hermetic seals. Heat is generated from Rear and Front Heaters or one set only as required using a simple On/Off Switch. Individual heating assemblies can be regulated due to dual controls.
- Uniform air on all sealing and cooling surfaces creates consistent quality validatable seals.
- Chrome plated sealing assemblies followed by Nickel plated Cooling Section reduces wear assuring longevity of use.
- Dual Element Thermocouples: Each has two junctions one for the Temperature Controller and one for Temperature Verification to external ports for easy Validation.
- Optional Single Line Embossing Code (shown) is available upon request.
- Optional stainless steel adjustable Infeed Product Carry Shelf for ease of entry.
- External compressed air required 60 psi @ less than 0.1 SCFM. 110VAC/ 60 Cycle 10 amps.

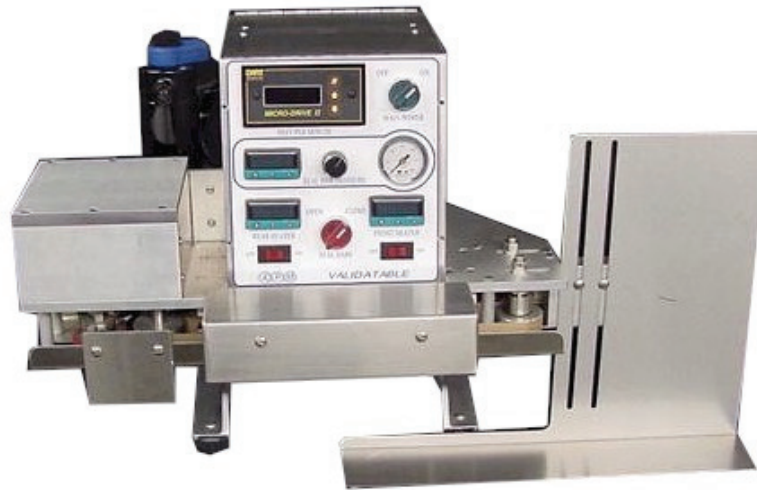

OVER 50 YEARS OF SUCCESSFUL PACKAGING EXPERIENCE

ALL PACKAGING MACHINERY, CORP.

90 13th Avenue, Ronkonkoma, NY 11779
(631) 588-7310 Fax (631) 467-4690
Call Toll Free 1-800-637-8808
www.allpackagingmachinery.com